


Dimensions (mm)

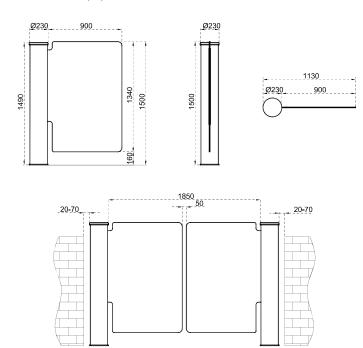

Technical Features

roommour routuroo		
Place of Use	Indoors	
Operating Temperature, Humidity	-20°C/+68°C (opt50°C with heater positive), RH %95 non-condensing.	
Operating Intensity	%100, 7/24 use.	
Material Features	Body	304 grade (opt, 316 grade) satine brushed stainless steel.
	Top Lid	10 mm black tempered glass, choice of top lid hollowed for surface mounted access control device is also available.
	Wing	10 mm tempered glass with 900 mm wing width.
Indicators	Direction and Passage Indicators: RGB LED under top lid standard.	
Power	Operating Voltage : 110/220V AC 50/60 Hz. (±%10), 24V DC. Consumption : ~2W at stand-by, max ~40W (varies according to the options and accessories used).	
Operating Modes	System operates bi-directionally (entry-exit). Operation modes can be changed through dip switch, IOS and/or android app. Entry - exit controlled Entry - exit free (with optional photocell) Entry controlled, exit free (with optional photocell)	
Operating System	Electromechanical motorized operation.	
Control System	All functions, parameters and operating modes can be changed through the control board (micropro-cessor controlled), IOS and/or androi app. Firmware can be updated. All past function updates and changes are kept in the server and records can be traced. All inputs are opto-coupler protected. Controllable by dry contact (ground control). Compatible with all kinds of access control device. Optional RS232, RS485 or TCP/IP module is available.	
Flow Rate	Wing opening / closing time: 1,5 – 2,0 sec.	
Emergency Mode	System provides a free passageway (entry-exit) by opening the wing in preferred direction configured by dip switch (fail safe). Works compatible with fire warning and similar systems. At the end of an emergency situation, system returns to its normal operating mode.	
Power-off Situation	System provides a free passageway (entry-exit) by manually pushing the wing towards entry or exit directions (fail safe).	
Weight	~95 kg	
Optional Features and Accessories	Wireless remote control (receiver-transmitter), manual control, counter (with/without reset), card reader mounting bracket, heater positive, bottom plate, battery back-up, 316 grade stainless steel, RS232-RS485-TCP/IP modules, different outer body materials (mirror black, bronze, etc.), different top lid materials (stainless steel, natural granite, etc.), photocell for free mode.	